



JBL Flip 3 Speaker Replacement

JBL Flip 3 Speaker Replacement

Written By: Faizan Naveed





TOOLS:

- [Pry Bar](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Removing Speaker Grill Part 1




- Using a pry opening tool, pry into the speaker grill covering as seen in the photos.

Step 2 — Removing Speaker Grill Part 2




- Continue to pry open the grill all the way around until it can be removed from the unit itself as seen in the pictures.

Step 3 — Remove Speaker Screws

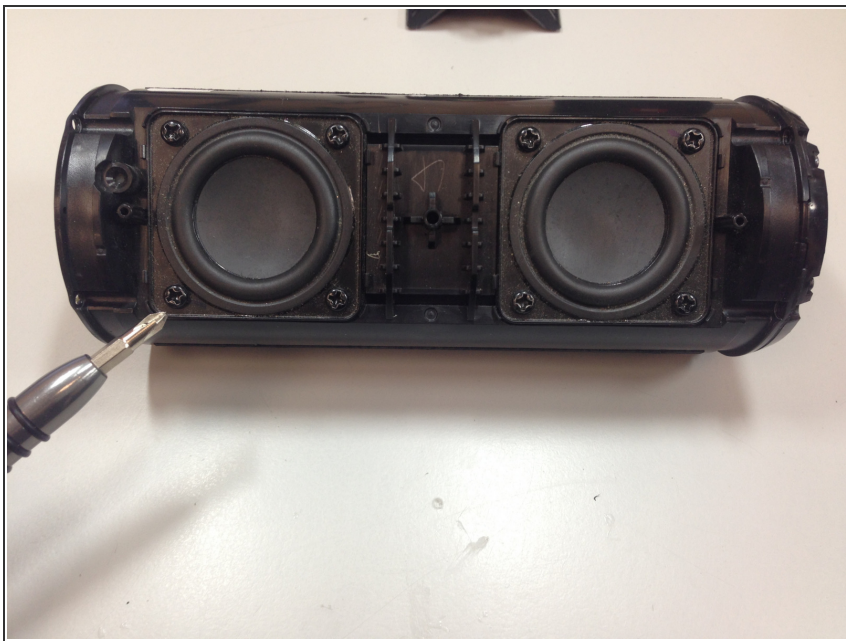



- Remove all 8 speaker screws using a Philips 00 screwdriver.

Step 4 — Remove Speaker from Housing

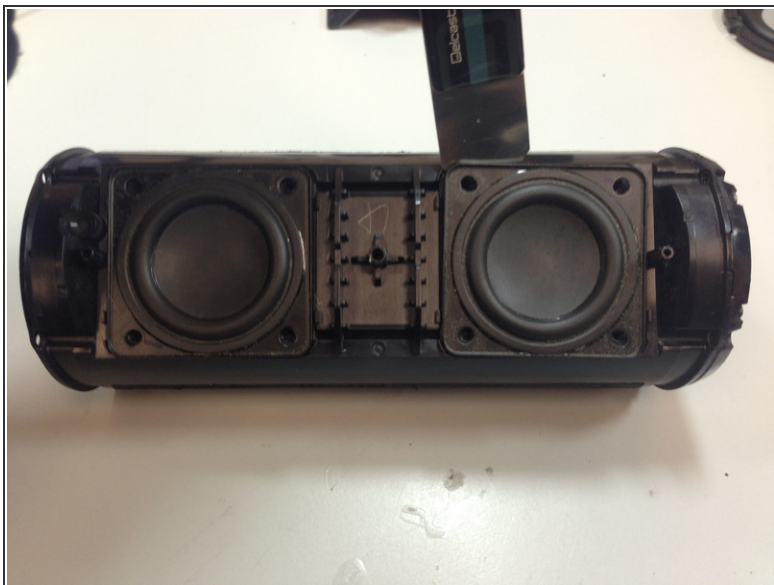

- Using a pry tool, remove speakers from housing as seen in the picture.

Step 5 — Remove Speaker Connection

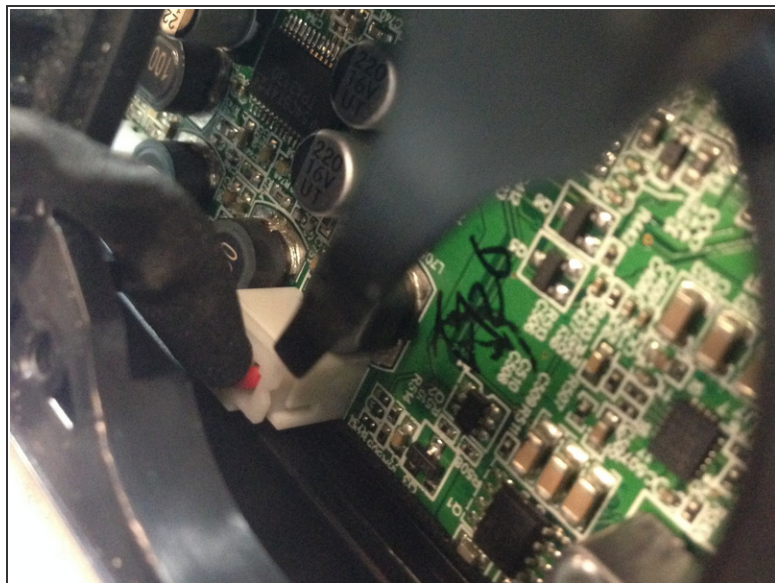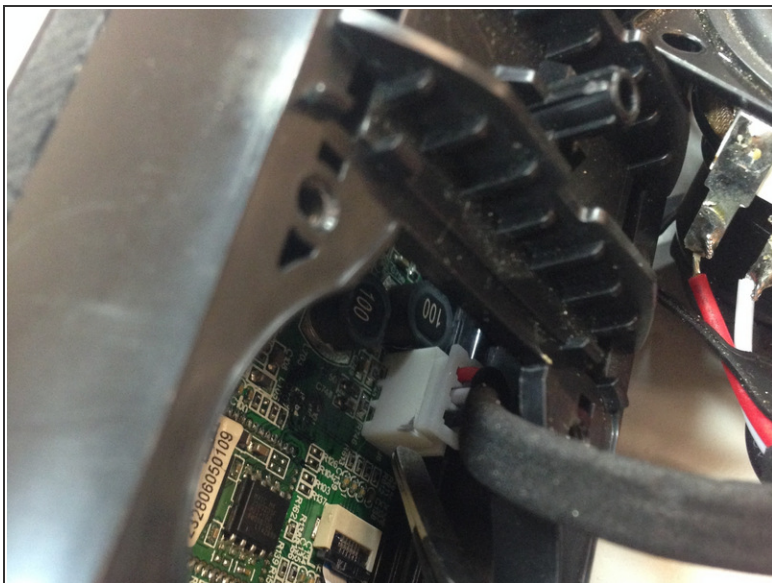

- Using tweezers, carefully remove both side speakers from the motherboard as shown in the pictures.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-24 09:06:18 AM.